


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-430HDL	束线带S	GT-430HDL	430	9.0	110	79.4		

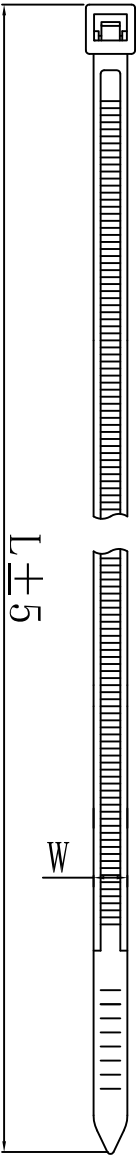

材质: 采用UL认证尼龙66, 额定电压94V-2, 耐酸、耐碱、绝缘性好, 不易老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES									
0.0 0.00	±0.2									
FIRST ANGLE PROJ		A	NEW PART	<i>outliuan</i>	<i>zy wang</i>	<i>202108</i>				
		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE				
							DWG. BY	<i>lia liang</i>	UNIT	mm
							CHK. BY	<i>outliuan</i>	REV.	A
							APP. BY	<i>wang zhiyuan</i>	DWG. NO.	HIWA/OR-JZ-31-HIWA-430HDL
							 苏州惠华电子科技有限公司			

未经并受权不得修改和复印
该知识产权属于技术质量部